



- Universal module
- Compact dimensions

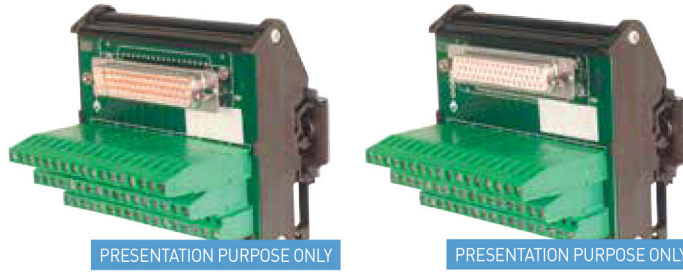


NOTE

The terminal number corresponds to the connector number

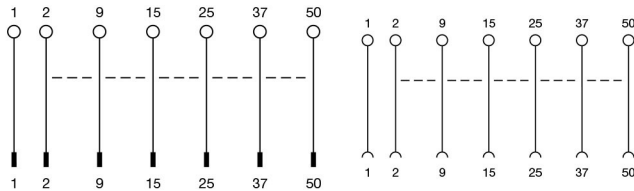


CODE	XCPD25M	XCPD25F
TYPE	CPD25M	CPD25F
GENERAL TECHNICAL DATA		
Number of poles	25	25
Version	D-sub male	D-sub female
Input rated voltage	0...25 Vac / 0...60 Vdc	0...25 Vac / 0...60 Vdc
Input rated current	2 A max	2 A max
Operating temperature	-20...+60°C	-20...+60°C
Standards approvals	—	—
Overvoltage category / pollution degree	II / 2	II / 2
Protection degree	IP 00	IP 00
Connection terminal	2.5 mm ² screw	2.5 mm ² screw
Status indication	—	—
Dimensions	57x80x93 mm	57x80x93 mm
Approximate weight	—	—
Housing material	UL94V-0 plastic material	UL94V-0 plastic material
Mounting informations	vertical on rails, side by side	vertical on rails, side by side
APPROVALS	CE	CE
ACCESSORIES		
Mounting rail IEC60715 TH35 75	PR003, PR903, PR005, PR917	PR003, PR903, PR005, PR920
Mounting rail IEC60715 TH35 15	PR007, PR907, PR006, PR918	PR007, PR907, PR006, PR921

- Universal module
- Compact dimensions

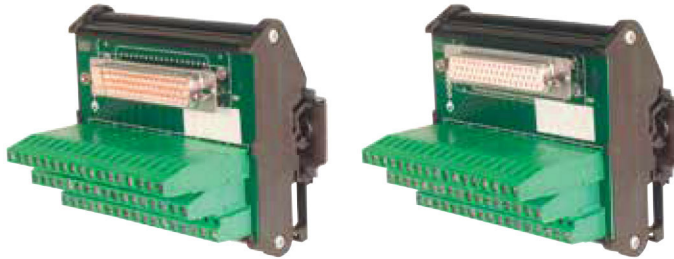

NOTE

The terminal number corresponds to the connector number

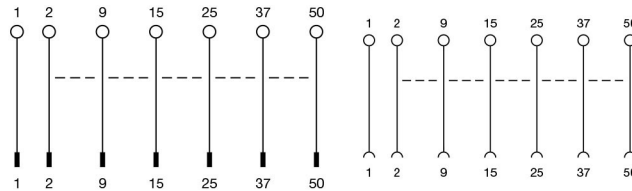


CODE	XCPD37M		XCPD37F	
TYPE	CPD37M		CPD37F	
GENERAL TECHNICAL DATA				
Number of poles	37		37	
Version	D-sub male		D-sub female	
Input rated voltage	0...25 Vac / 0...60 Vdc		0...25 Vac / 0...60 Vdc	
Input rated current	2 A max		2 A max	
Operating temperature	-20...+60°C		-20...+60°C	
Standards approvals	—		—	
Overvoltage category / pollution degree	II / 2		II / 2	
Protection degree	IP 00		IP 00	
Connection terminal	2.5 mm ² screw		2.5 mm ² screw	
Status indication	—		—	
Dimensions	77x80x93 mm		77x80x93 mm	
Approximate weight	—		—	
Housing material	UL94V-0 plastic material		UL94V-0 plastic material	
Mounting informations	vertical on rails, side by side		vertical on rails, side by side	
APPROVALS	CE		CE	
ACCESSORIES				
Mounting rail IEC60715 TH35 75	PR003, PR903, PR005, PR918		PR003, PR903, PR005, PR921	
Mounting rail IEC60715 TH35 15	PR007, PR907, PR006, PR919		PR007, PR907, PR006, PR922	

- Universal module
- Compact dimensions



NOTE

The terminal number corresponds to the connector number

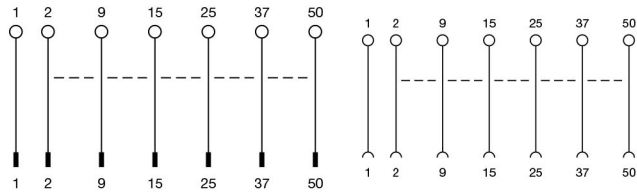

CODE	XCPD50M	XCPD50F
TYPE	CPD50M	CPD50F
GENERAL TECHNICAL DATA		
Number of poles	50	50
Version	D-sub male	D-sub female
Input rated voltage	0...25 Vac / 0...60 Vdc	0...25 Vac / 0...60 Vdc
Input rated current	2 A max	2 A max
Operating temperature	-20...+60°C	-20...+60°C
Standards approvals	—	—
Overvoltage category / pollution degree	II / 2	II / 2
Protection degree	IP 00	IP 00
Connection terminal	2.5 mm ² screw	2.5 mm ² screw
Status indication	—	—
Dimensions	92x80x93 mm	92x80x93 mm
Approximate weight	—	—
Housing material	UL94V-0 plastic material	UL94V-0 plastic material
Mounting informations	vertical on rails, side by side	vertical on rails, side by side
APPROVALS	CE	CE
ACCESSORIES		
Mounting rail IEC60715 TH35 75	PR003, PR903, PR005, PR919	PR003, PR903, PR005, PR922
Mounting rail IEC60715 TH35 15	PR007, PR907, PR006, PR920	PR007, PR907, PR006, PR923