

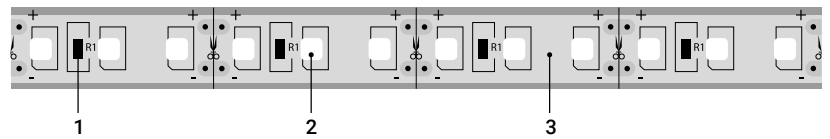


FLEXIBLE STRIP LED

1. Resistance
2. LED
3. Flexible PCB

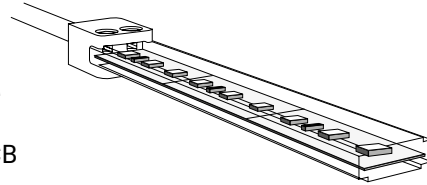

Part#	Pkg Size	Roll Length
PL-120V-JB50SI-225W-14-2835-PW	1 Roll	50 m (164 ft)
PL-120V-JB75SI-337.5W-14-2835-PW	1 Roll	75 m (246 ft)
PL-120V-JB100SI-450W-14-2835-PW	1 Roll	100 m (328 ft)

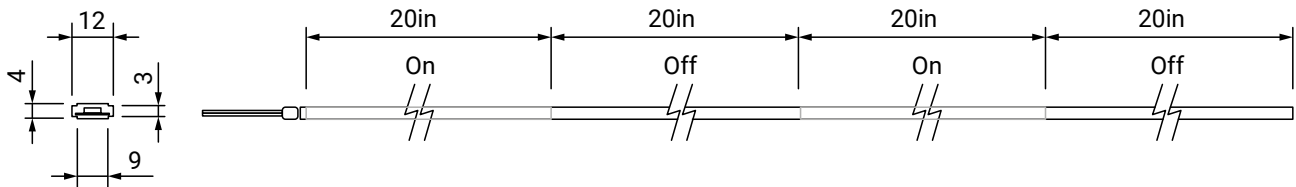

		ASI30
Voltage		120V AC $\pm 15\%$
Power		5 W/m
Flux		450 lm/m
Protection *		IP 65
Operating temperature		-40 ... +70°C
Flame retardant class	UL94	V1
UV class	UL94	F1
Dimmable & flickerless with		PF > 0.85
Beam angle		120°
Color		pure white 6000-6500K
Car top illumination level:		3fc/30 lux @ 10ft distance from light
Maximum powered length		100 m
Cutting points distance		1.5 m