


## GPM Series high current terminal blocks

with UL94V-0 polyamide  
insulating body

- universal mounting onto both PR/DIN and PR/3 type rails - according to IEC 60715 Std., "G32" and "TH/35" types
- panel-mount version available - M6 screw (screw with groove for screwdriver and washer recommended)
- possibility to perform parallel cross-connections
- available in beige RAL 1001 colour



standard version

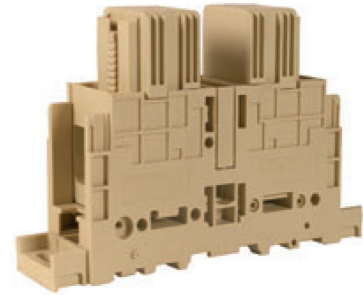

panel-mount version

standard version	GPM.95/CC Cat. No. GP300	GPM.150/CC Cat. No. GP600	GPM.240/CC Cat. No. GP900
panel-mount version	GPM.95/CC/FIX Cat. No. GP310	GPM.150/CC/FIX Cat. No. GP610	GPM.240/CC/FIX Cat. No. GP910
TECHNICAL CHARACTERISTICS			
function / type	feed-through	feed-through	feed-through
rated cross-section (mm <sup>2</sup> )	95	150	240
connecting capacity			
flexible (mm <sup>2</sup> )	35 ÷ 120	50 ÷ 185	95 ÷ 300
rigid (mm <sup>2</sup> )	25 ÷ 120	35 ÷ 185	95 ÷ 300
bars and/or cable lugs	22 mm maximum width (M8 bolt)	32 mm maximum width (M10 bolt)	40 mm maximum width (M12 bolt)
rated voltage / rated current / gauge conf. to IEC 60947-7-1	1000 V / 269 A / B12	1000 V / 353 A / B14	1000 V / 452 A / B16
rated voltage / rated current / AWG	-	-	-
rated impulse withstand voltage / pollution degree	12 KV / 3	12 KV / 3	12 KV / 3
insulation stripping length (mm)	-	-	-
tightening torque value -bar (test / recommended) (Nm)	-	-	-
tightening torque value -cable (test / recommended) (Nm)	6 / 9 (Allen screw, 6 mm wrench)	10 / 15 (Allen screw, 8 mm wrench)	14 / 21 (Allen screw, 8 mm wrench)
height / width / thickness TH/35 7,5 mm	113 / 140 / 32	134 / 140 / 42	150 / 154 / 52
height / width / thickness TH/35 15 mm	120 / 140 / 32	141 / 140 / 42	157 / 154 / 52
height / width / thickness G32	117 / 140 / 32	138 / 140 / 42	154 / 154 / 52
height / width (fixing distance between centres) / thickness (panel-mount)	108 / 173 (158) / 32	129 / 173 (158) / 42	144 / 187 (172) / 52
UL, cUL, ATEX and IEC Ex pending			
APPROVALS			
ACCESSORIES			
End sections	beige	-	-
Permanent cross connection			
	POF/95/2 poles P0952	POF/150/2 poles P0152	POF/240/2 poles P0242
	POF/95/3 poles P0953	POF/150/3 poles P0153	POF/240/3 poles P0243
Switchable cross connection	-	-	-
Multiple common bar	250 mm	-	-
Shunting screw and sleeve	-	-	-
Coloured partition	red, green, white	-	-
Cross connection barrier	red	-	-
Test plug socket	-	-	-
Test plug	-	-	-
Numbering strip	-	-	-
Cover for cross-connection	-	-	-
Mounting rail support	flat for PR/DIN and PR/3 inclined for PR/DIN and PR/3		
	ACH121213 Z121213	ACH121213 Z121213	ACH121213 Z121213
	ACH121024 Z121024	ACH121024 Z121024	ACH121024 Z121024
Marking tag	CNU/8/51 NU0851	CNU/8/51 NU0851	CNU/8/51 NU0851
	CSC CS...	CSC CS...	CSC CS...
End bracket			
	BTU for PR/DIN and PR/3 BT005	BTU for PR/DIN and PR/3 BT005	BTU for PR/DIN and PR/3 BT005
	CDA/BT for PR/DIN only CD003	CDA/BT for PR/DIN only CD003	CDA/BT for PR/DIN only CD003
	BT/3-BTO for PR/3 only BT003-BT007	BT/3-BTO for PR/3 only BT003-BT007	BT/3-BTO for PR/3 only BT003-BT007
Mounting rail according to IEC 60715 Std.	PR/DIN/AC of steel PR001	PR/DIN/AC of steel PR001	PR/DIN/AC of steel PR001
	PR/DIN/AS same with slots PR004	PR/DIN/AS same with slots PR004	PR/DIN/AS same with slots PR004
	PR/DIN/AL of aluminium PR002	PR/DIN/AL of aluminium PR002	PR/DIN/AL of aluminium PR002
	PR/3/AC of steel PR003	PR/3/AC of steel PR003	PR/3/AC of steel PR003
	PR/3/AS same with slots PR005	PR/3/AS same with slots PR005	PR/3/AS same with slots PR005