


General Product Information

1. Widerange input voltage: 85-264VAC.
2. High stability, low output ripple and high reliability.
3. Over-current, over-voltage, short-circuit, protection.
4. Low Power consumption, high efficiency, compact size and light weight.
5. Mounts on standard DIN rail.
6. Two year warranty.

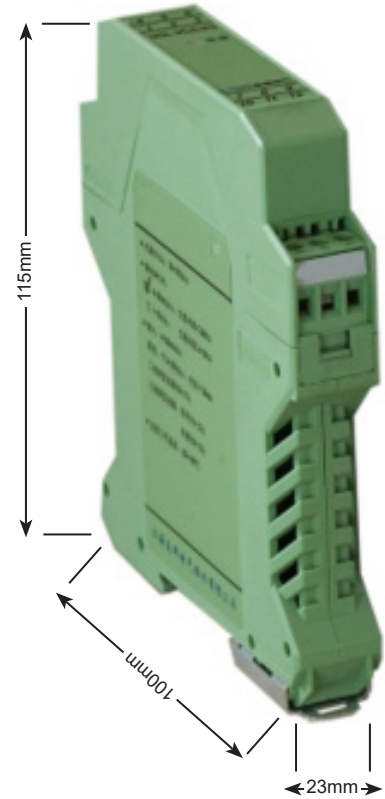

Technical Data

Input Parameters

- Rated Input Voltage: 115VAC/230VAC
- Input Current(typical): 0.3A/115VAC, 0.16A/230VAC
- Frequency Range: 47-63Hz
- Efficiency: 84%

Dimensions

- L/W/H: 100 x 23 x 115mm

Output Parameters

- Rated Output Voltage: 24 Vdc
- Output Current Range: 0-1A
- Power: 24W
- Ripple and Noise: 100mVpp
- Voltage Tolerance : +1.0%
- Linear Regulation: +0.30%
- Load Regulation Factor: +0.3%
- Hold Time(Min): 20mS
- Overload Protection: 110-150% of rated output power
- Overvoltage Protection: 17.2-20.3V