


Two and three level circuits

- with flat plug connections
- universal mounting for both PR/DIN and PR/3 rails which meet IEC 60715 norms, "G32" and TH/35 types
- available in beige and grey
- maximum continual operating temperature 100°C



Flat plug terminals, 6.3 x 0.8 mm, or 2.8 x 0.8 mm, compliant with the IEC 60760 Standard

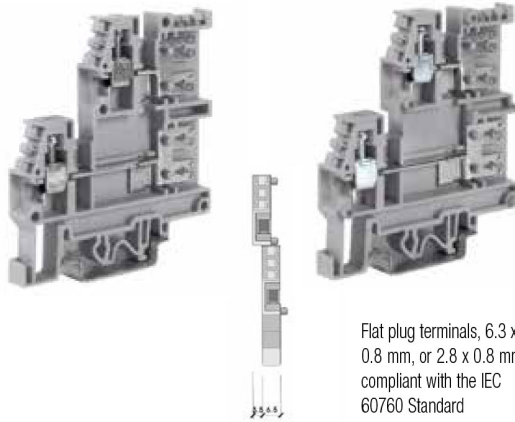

FVS/VCI - Cat. No. FV107
Shunting screws and sleeves for internal connection between the front and rear conducting bodies of terminal block type FVS.4



FVS/VCE - Code FV108
Screw and sleeve which, besides the internal connection, creates, using the PMP common bar, parallel between contiguous terminal blocks

The **/GR** tag indicates the grey version.

grey version	
beige version	
(Ex)i version	
TECHNICAL CHARACTERISTICS	
function/type	
rated cross-section	(mm ²)
connecting capacity	
flexible	(mm ²)
rigid	(mm ²)
max. flexible with ferrule (mm ²) - ferrule type	
rated voltage / rated current / gauge	conf. to IEC 60947-7-1
rated voltage / rated current / AWG / tightening torque value	UL
(Ex e) rated voltage	(V)
rated impulse withstand voltage / pollution degree	
insulation stripping length	(mm)
tightening torque value (test / max)	(Nm)
height / width / thickness	TH/35 7.5 mm
height / width / thickness	TH/35 15 mm
height / width / thickness	G32

FVS.4/GR	Cat. No. FV100GR
FVS.4	Cat. No. FV100



for overlapped circuits	4
0.2 - 6	
0.2 - 6	
4 - WP40/16	
320 V / 20 A / A4	
600 V / 20 A / 20-10 AWG / 8.9 lb.in.	
-	
6 kV / 3	
12	
0.8 / 1.2	
69 / 64 / 6.5	
77 / 64 / 6.5	
73 / 64 / 6.5	

FFS.4/GR	Cat. No. FF100GR
FFS.4	Cat. No. FF100



for overlapped circuits in staggered position	4
0.2 - 6	
0.2 - 6	
4 - WP40/16	
320 V / 20 A / A4	
600 V / 20 A / 20-10 AWG / 8.9 lb.in.	
-	
6 kV / 3	
12	
0.8 / 1.2	
69 / 64 / 6.5	
77 / 64 / 6.5	
73 / 64 / 6.5	


APPROVALS



ACCESSORIES	
End sections	grey beige blue
Permanent cross connection	
Rated current carrying capacity of jumper	(A)
Switchable cross connection	
Multiple common bar	250 mm
Shunting screw and sleeve	
Coloured partition	red, green, white
Cross connection barrier	red
Test plug socket	
Test plug	
Modular test plug	
End section for modular test plug	
Numbering strip	
Shunting screw and sleeve	
Cover for cross-connection	
Marking tag	printed or blank
End bracket	


Type	Cat. No.
FVS/PT/GR	FV101GR
FVS/PT	FV101
32	
POS/72	POS72
PMP/02	PMP02
CPM/01 (CPX/01)	CPM01 (CPX01)
DFU/6	DU06..
-	
PSD/A	PD001
SDD/1	DD001
-	
-	
-	
FVS/VCI	FV107
FVS/VCE	FV108
PRP/6	PRP06
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BT0 for PR/3 only	BT003-BT007

Type	Cat. No.
FFS/PT/GR	FF101GR
FFS/PT	FF101
32	
POS/72	POS72
PMP/02	PMP02
CPM/01 (CPX/01)	CPM01 (CPX01)
-	
PSD/A	PD001
SDD/1	DD001
-	
-	
-	
PRP/6	PRP06
CNU/8/51	NU0851
BTU for PR/DIN and PR/3	BT005
BT/DIN/PO for PR/DIN only	BT001
BT/3-BT0 for PR/3 only	BT003-BT007




VCI
internal cross connection

PMP bar
(to be added to VCE)



VCE
internal +
front adjoining cross-connection



VCI + PM
internal parallel +
rear adjoining cross connection