




## High Current DIN Rail Mounted Terminal Blocks

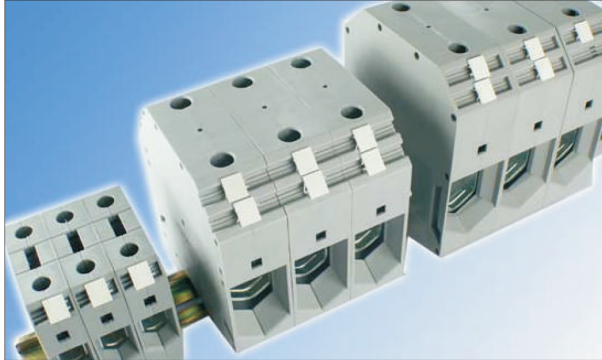

UKJ high-current terminal blocks meet international IEC 60947-7-1 standards, connection capacity: 16-240mm<sup>2</sup>.

### Features:



- 1.Can be installed on the rails both  and .
- 2.Low contact resistance with grooved bottom of screw cage.
- 3.High-current terminal blocks can be connected to the conductors of smaller cross section using a tap-off terminal block.
- 4.The housing is made from PA66,which is all closed and insulating.

### ASIUKH50

High-current terminal block  
UKJ-50



UL us CE RoHS

Dimensions			
Width/Thickness/Height	(mm)	71 / 20 / 76	
Screw thread	(mm)	M6	
Tightening torque	(Nm)	6-8	
Stripping length	(mm)	24	
Technical data			
Voltage	(V)	1000	
Max. operating current	(A)	150	
Cross section	(mm <sup>2</sup> )	50	
Connection capacity			
Solid conductors	(mm <sup>2</sup> )	16-50	
Stranded conductors	(mm <sup>2</sup> )	25-50	
Terminal block	Type	Order no.	
	UKJ-50	011013	
	BU:Blue UKJ-50 (BU)	011107	
Mounting rail			
Can be installed on the rails both  and 			
	TH35-7.5	102001	
	TH35-15	102005	
	G32-15	102002	
	G32-18	102003	
Fixed bridge			
For cross connection in the terminal center. Screw heads with insulation collar or without.	2-pos.	UFBI 2-20	013034
	3-pos.	UFBI 3-20	013035
	10-pos.	UFBI 2-20N	013156
	2-pos.	UFBI 3-20N	013157
	3-pos.		
	N:With insulation collar.		
Insertion bridge			
For the connection points with conductors, makes level bridge possible.	2-pos.		
	3-pos.		
Tap-off terminal block			
A contact to the conductors of smaller cross section can be established.		UKJ-50FJ	010001
Insertion profile			
For flat conductor connection.		UKJ-50LP	017001
Marker strip			
Horizontally/Vertically	Blank	UZB 10-10 (Blank)	014004
Can be printed 1-600, or the technical data according to your requirements.	Horizontally	UZB 10-10 (Horizontally)	014011
	Vertically	UZB 10-10 (Vertically)	014012
Screwdriver			
		YB 1.2×8.0	

## ASIUKH95

High-current terminal block  
**UKJ-95**



UL US CE CCC ENEC Ex RoHS

## ASIUKH150

High-current terminal block  
**UKJ-150**



UL US CE CCC ENEC Ex RoHS

## ASIUKH240

High-current terminal block  
**UKJ-240**



UL US CE CCC ENEC Ex RoHS

Dimensions		ASIUKH95		ASIUKH150		ASIUKH240		
Width/Thickness/Height	(mm)	83.2 / 25 / 90.1		101.4 / 32 / 111		100 / 37.6 / 126		
Screw thread	(mm)	M8(Hexagon socket head cap screws)		M10(Hexagon socket head cap screws)		M10(Hexagon socket head cap screws)		
Tightening torque	(Nm)	15-20		25-30		25-30		
Stripping length	(mm)	33		40		40		
Technical data		ASIUKH95		ASIUKH150		ASIUKH240		
Voltage	(V)	1000		1000		1000		
Max. operating current	(A)	232		309		415		
Cross section	(mm <sup>2</sup> )	95		150		240		
Connection capacity		ASIUKH95		ASIUKH150		ASIUKH240		
Solid conductors	(mm <sup>2</sup> )	25-95		35-150		70-240		
Stranded conductors	(mm <sup>2</sup> )	35-95		50-150		70-240		
Terminal block		Type	Order no.	Type	Order no.	Type	Order no.	
		UKJ-95	011014	UKJ-150	011015	UKJ-240	011062	
	BU:Blue	UKJ-95 (BU)	011108	UKJ-150 (BU)	011109	UKJ-240 (BU)	011144	
Mounting rail		ASIUKH95		ASIUKH150		ASIUKH240		
Can be installed on the rails both and		TH35-7.5	102001	TH35-7.5	102001	TH35-7.5	102001	
		TH35-15	102005	TH35-15	102005	TH35-15	102005	
		G32-15	102002	G32-15	102002	G32-15	102002	
		G32-18	102003	G32-18	102003	G32-18	102003	
Fixed bridge		ASIUKH95		ASIUKH150		ASIUKH240		
For cross connection in the terminal center. Screw heads with insulation collar or without.		2-pos.		2-pos.		2-pos.		
		3-pos.		3-pos.		3-pos.		
		10-pos.		10-pos.		10-pos.		
		2-pos.		2-pos.		2-pos.		
		3-pos.		3-pos.		3-pos.		
	N:With insulation collar.							
Insertion bridge		ASIUKH95		ASIUKH150		ASIUKH240		
For the connection points with conductors, makes level bridge possible.		2-pos.	UEB 2-25	013036	UEB 2-32	013038	UEB 2-36	013069
		3-pos.	UEB 3-25	013037	UEB 3-32	013039	UEB 3-36	013158
Tap-off terminal block		ASIUKH95		ASIUKH150		ASIUKH240		
A contact to the conductors of smaller cross section can be established.		UKJ-95FJ	010002	UKJ-150/240FJ	010003	UKJ-150/240FJ	010003	
Insertion profile		ASIUKH95		ASIUKH150		ASIUKH240		
For flat conductor connection.		UKJ-95LP	017002	UKJ-150/240LP	017003	UKJ-150/240LP	017003	
Marker strip		ASIUKH95		ASIUKH150		ASIUKH240		
Horizontally/Vertically		UZB 10-10 (Blank)	014004	UZB 10-10 (Blank)	014004	UZB 10-10 (Blank)	014004	
Can be printed 1-600, or the technical data according to your requirements.	Blank	UZB 10-10 (Horizontally)	014011	UZB 10-10 (Horizontally)	014011	UZB 10-10 (Horizontally)	014011	
	Horizontally	UZB 10-10 (Vertically)	014012	UZB 10-10 (Vertically)	014012	UZB 10-10 (Vertically)	014012	
	Vertically							
Screwdriver								