


Certification	
Material	
Screw	M3, Steel Zinc Plated
Clamp	Copper Alloy, Nickel Plated
Pin/Plate	Copper Alloy, Tin Plated
Housing	PA66, UL 94V-0, Green
Electrical	
Standard	UL 1059/CSA C22.2 No. 158
Rated Voltage	300 V
Rated Current	30 A
Wire Range	26-10 AWG
Contact Resistance	20mΩ
Insulation Resistance	500MΩ/500 Vdc
Withstand Voltage	2000 Vac/1 Min
Mechanical	
Temperature Range	-40°C...+105°C
Torque	0.5N-m (4.4lb-in)
Strip Length	6-7 mm (0.24-0.28")
Size	
Pitch	7.5 mm (.295")
Poles	2P-3P. Additional sizes available on request.

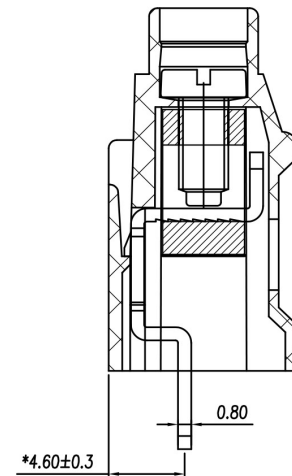

Item	No. of Poles	Length (mm)
ASIWJ750-7.5-2P	2	16.1
ASIWJ750-7.5-3P	3	23.6