


## Standard Pluggable PCB Terminal Block, Horizontal Header, Open End CPM5.08-SQA

The CPM family of printed circuit board headers is used with the CPF and MRT3 pluggable terminal blocks. The CPM is available in both a vertical and 90 degree version and with either open or closed ends. A feature of the CPM header is the molded-in polarization that insures proper mating of the plug. The CPM headers are available in 2 to 24 positions and have a UL rating of 12 amps, 300 volts. The standard color is green, however other colors are available upon request.

### SPECIFICATIONS

Housing Material:	PA68 Polyamide, Flammable UL94V0
Housing Color:	Green
Pin:	Tin Plated Brass
PCB Mounting Hole:	1.6 mm
Nominal Current:	12A
Voltage:	300V
Temperature Range:	-30° C to 85° C

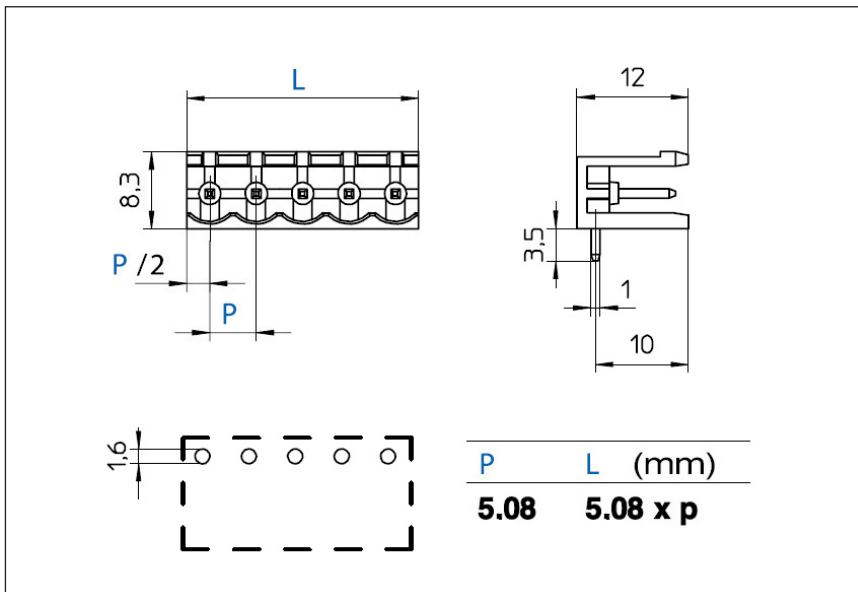

Item	No. of Poles	Length (mm)
CPM5.08-2SQAVE	2	10.16
CPM5.08-3SQAVE	3	15.24
CPM5.08-4SQAVE	4	20.32
CPM5.08-5SQAVE	5	25.40
CPM5.08-6SQAVE	6	30.48
CPM5.08-7SQAVE	7	35.56
CPM5.08-8SQAVE	8	40.64
CPM5.08-9SQAVE	9	45.72
CPM5.08-10SAQVE	10	50.80
CPM5.08-11SQAVE	11	55.88
CPM5.08-12SQAVE	12	60.96
CPM5.08-13SQAVE	13	66.04
CPM5.08-14SQAVE	14	71.12
CPM5.08-15SQAVE	15	76.20
CPM5.08-16SQAVE	16	81.28
CPM5.08-17SQAVE	17	86.36
CPM5.08-18SQAVE	18	91.44
CPM5.08-19SQAVE	19	96.52
CPM5.08-20SQAVE	20	101.60
CPM5.08-21SQAVE	21	106.68
CPM5.08-22SQAVE	22	111.76
CPM5.08-23SQAVE	23	116.84
CPM5.08-24SQAVE	24	121.92