


Standard Pluggable PCB Terminal Block Horizontal Header, Open End CPM5.0-SQA

The CPM family of printed circuit board headers is used with the CPF and MRT3 pluggable terminal blocks. The CPM is available in both a vertical and 90 degree version and with either open or closed ends. A feature of the CPM header is the molded-in polarization that insures proper mating of the plug. The CPM headers are available in 2 to 24 positions and have a UL rating of 16 amps, 300 volts. The standard color is green, however other colors are available upon request.

SPECIFICATIONS

Housing Material:	PA68 Polyamide, Flammable UL94V0
Housing Color:	Green
Pin:	Tin Plated Brass
PCB Mounting Hole:	1.6 mm
Nominal Current:	16A
Voltage:	300V
Temperature Range:	-30° C to 85° C

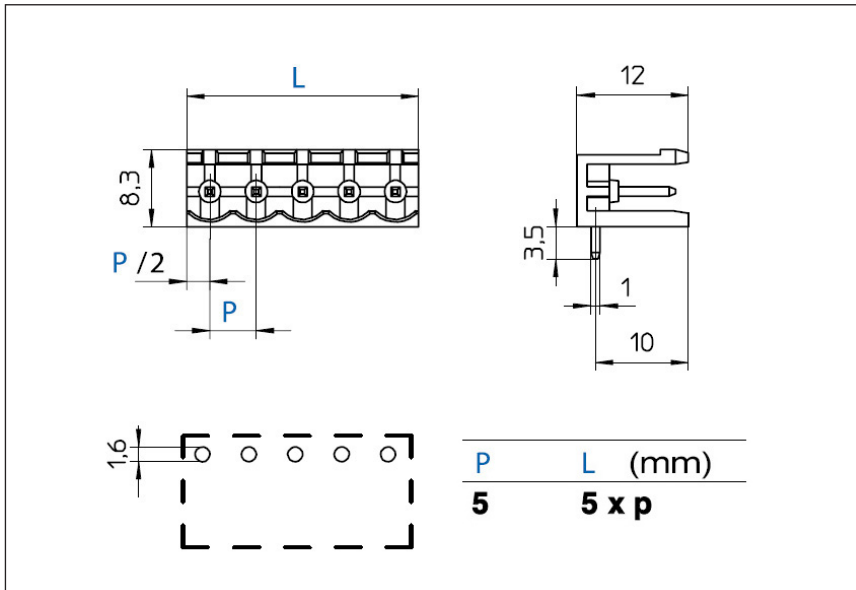

Item	No. of Poles	Length (mm)
CPM5-2SQAVE	2	10
CPM5-3SQAVE	3	15
CPM5-4SQAVE	4	20
CPM5-5SQAVE	5	25
CPM5-6SQAVE	6	30
CPM5-7SQAVE	7	35
CPM5-8SQAVE	8	40
CPM5-9SQAVE	9	45
CPM5-10SAQVE	10	50
CPM5-11SQAVE	11	55
CPM5-12SQAVE	12	60
CPM5-13SQAVE	13	65
CPM5-14SQAVE	14	70
CPM5-15SQAVE	15	75
CPM5-16SQAVE	16	80
CPM5-17SQAVE	17	85
CPM5-18SQAVE	18	90
CPM5-19SQAVE	19	95
CPM5-20SQAVE	20	100
CPM5-21SQAVE	21	105
CPM5-22SQAVE	22	110
CPM5-23SQAVE	23	115
CPM5-24SQAVE	24	120