


- Connector series: RJ45
- Gender: Male
- Locking type: Fix screw
- Mounting type: Straight
- Part No.: RJ45S-WM08STAF-WG

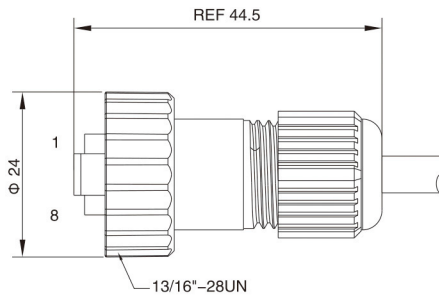


General information

Ambient temperature:	-20 °C ~ + 60 °C
Connector insert:	PC
Connector contacts:	Copper alloy, gold plated
Connector body:	PA + GF
Coupling nut/screw:	PA + GF
Seal/O-ring:	FKM

Insulation resistance:	≥ 100MΩ
Contact resistance :	≤ 30mΩ
Shielding:	Yes
IP rating:	IP 67 in locked condition

Electrical data & Mechanical data

Contacts	Rated current	Voltage		Wire gauge / size		Cable jacket	Wire insulation	Cable ending & length
		A/C	D/C	AWG	mm ²			
RJ45 8P 8C male	1.5A	125V	125V	24AWG	0.25	PVC	PE	Customized cable ending and length

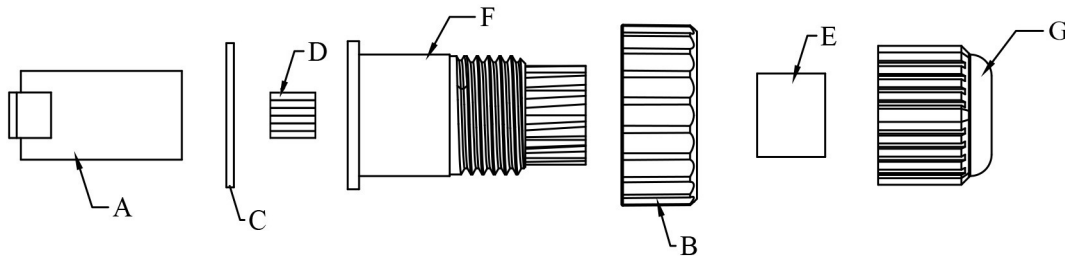

- | | | |
|---|--------------|----------------------------------------------------------------|
| A | Connector | RJ45 8P8C male connector with shield |
| B | Coupling Nut | 13/16"-28UN-2A coupling nut, molded with black PA+GF[XX-M0326] |
| C | Gasket | Black rubber gasket |
| D | Guide | Wire guide |
| E | Ring | Black rubber sealing ring |
| F | Body | RJ45 8P8C body |
| G | Gland | Black cable gland |