
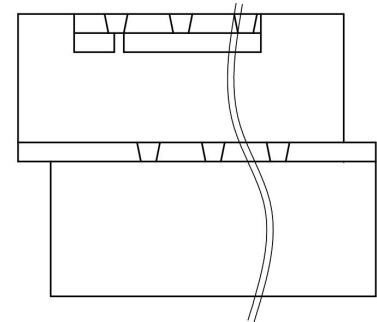


## PCB Terminal Blocks Double Level Horizontal Offset Header with Screw Lock ASIWJ2EDGRTM-5.0

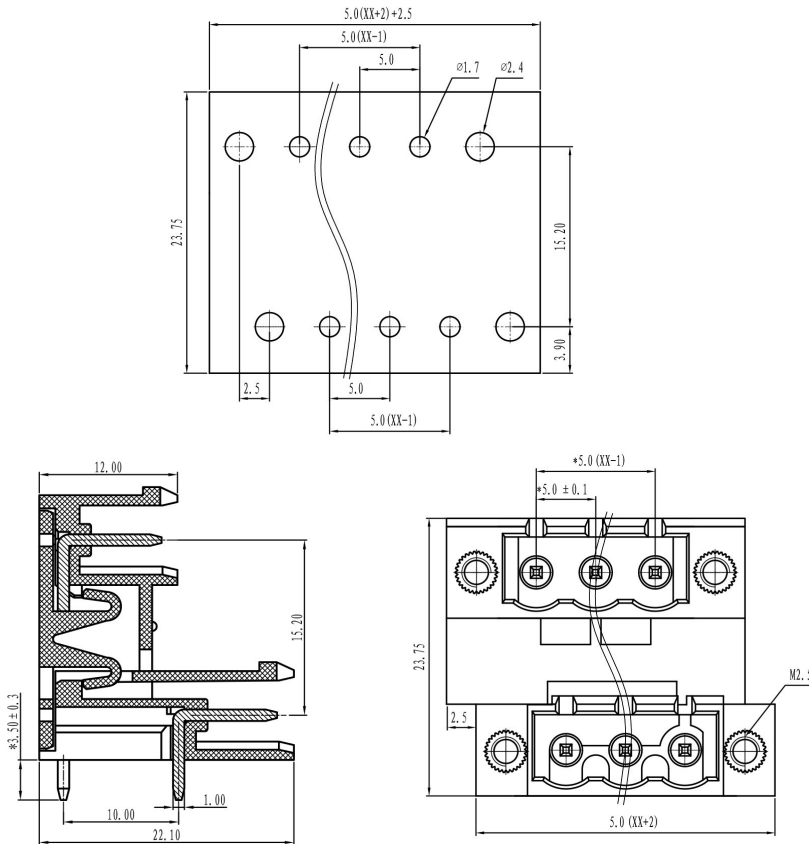

Certification	
Material	
Locking Nut	M2.5, Brass Plated
Pin/Plate	Brass, Tin Plated
Housing	PA66, UL 94V-0, Green
Electrical	
Standard	UL 1059/CSA C22.2 No. 158
Rated Voltage	300 V
Rated Current	15 A
Contact Resistance	20mΩ
Insulation Resistance	500MΩ/500 Vdc
Withstand Voltage	2000 Vac/1 Min
Mechanical	
Temperature Range	-40°C...+105°C
Size	
Pitch	5.0 mm (.197")
Poles	2P-16P. Additional sizes available on request.

Item	No. of Poles	Length (mm)
ASIWJ2EDGRTM-5.0-2P	2	22.5
ASIWJ2EDGRTM-5.0-3P	3	27.5
ASIWJ2EDGRTM-5.0-4P	4	32.5
ASIWJ2EDGRTM-5.0-5P	5	37.5
ASIWJ2EDGRTM-5.0-6P	6	42.5
ASIWJ2EDGRTM-5.0-7P	7	47.5
ASIWJ2EDGRTM-5.0-8P	8	52.5
ASIWJ2EDGRTM-5.0-9P	9	57.5
ASIWJ2EDGRTM-5.0-10P	10	62.5
ASIWJ2EDGRTM-5.0-11P	11	67.5
ASIWJ2EDGRTM-5.0-12P	12	72.5
ASIWJ2EDGRTM-5.0-13P	13	77.5
ASIWJ2EDGRTM-5.0-14P	14	82.5
ASIWJ2EDGRTM-5.0-15P	15	87.5
ASIWJ2EDGRTM-5.0-16P	16	92.5